

Load Cell Central

1-800-LOADCEL

Wireless Tension Link Load Cell / Crane Scale

Model: WL-CTL2

Ranges from 10,000 to 250,000 lbs.

The WL-CTL2 wireless tension link load cell is ideal for weighing and lifting applications such as with cranes, hoists, and winching, that may not lend themselves to standard cabled load cells--- where the cable could get damaged or where it may not be safe to be close to the load cell during a lift. When used with one of the T24 wireless LCD displays the load cell has a wireless communication "line of sight" range of 800 meters (2,600 feet) depending on the environment. The load cell is manufactured from heat treated alloy steel and is sealed to IP66 making it suitable for use outdoors.

Higher capacity and stainless steel load cells are also available.



Shown with optional display

Standard Capacities: 10K, 25K, 50K, 75K, 100K, 150K, 200K, 250K LB.

WL-CTL2 Features:	
Combined Error:	0.25% FS
Load Cell Battery Life:	Approx. 300 Hours
Wireless Range:	Approx. 100 Meters
Operating Temp.:	-35 to 65°C
Safe Overload:	200% FS
Ultimate Overload:	500% FS



WL-CTL2 Options:

- T24-HS, LCD Display (pictured above) - accepts input from 1 load cell.
- T24-HA, Display - accepts up to 12 load cells and optional summing.
- T24-HR, Display - accepts unlimited load cell inputs, used in roaming applications.
- Shackles
- Pelican® Carry case
- USB computer interface

Load Cell Central follows a policy of continuous improvement and reserves the right to change specifications without notice. © 2016

Load Cell Central
28175 Route 220
Milan, PA 18831


Web: www.800loadcel.com
Email: sales@800loadcel.com

Toll Free: 1-800-562-3235
Ph: 1-570-731-7048
Fax: 1-570-731-7054

Load Cell Central

1-800-LOADCEL

Dimensions:

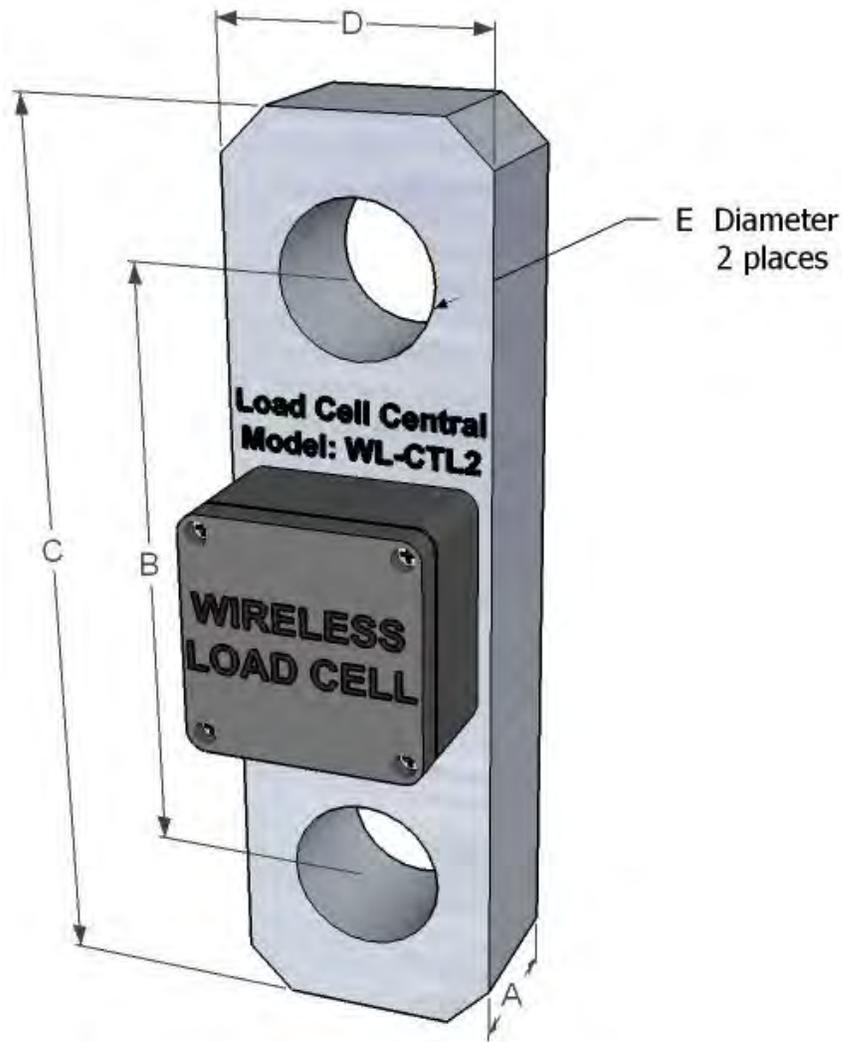

Capacity	A (Inches)	B (Inches)	C (Inches)	D (Inches)	E (Inches)	F (Inches)
10K LB	1.25	7.50	10.00	3.00	1.13	1.25
25K LB	1.25	7.75	11.00	3.00	1.63	1.63
50K LB	1.63	8.50	12.75	3.63	2.13	2.13
75K LB	1.88	9.37	14.25	4.50	2.38	2.44
100K LB	1.94	9.38	14.75	5.00	2.38	2.69
150K LB	2.44	11.00	17.50	6.75	2.88	3.25
200K LB	2.97	11.00	19.50	7.44	3.38	4.25
250K LB	2.94	18.38	22.38	8.50	3.88	4.38

Load Cell Central follows a policy of continuous improvement and reserves the right to change specifications without notice. © 2016

Load Cell Central
28175 Route 220
Milan, PA 18831

Web: www.800loadcel.com
Email: sales@800loadcel.com

Toll Free: 1-800-562-3235
Ph: 1-570-731-7048
Fax: 1-570-731-7054